



INFRARED FLASH CURE F-SERIES

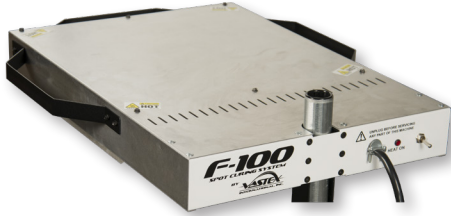

F-100
16" x 16" Heater
On/off power switch
Includes levelers

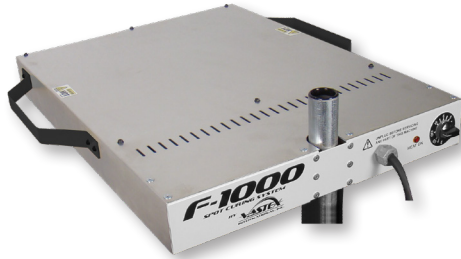

F-1000
18" x 18" Heater
Heat control
Includes wheels

High wattage and close coil density heater, for greater heater surface consistency.

Powerful heaters along with our built in heat shields allows Vastex flashes to be set closer to your garment, which increases efficiency and productivity.

**15 YEAR
HEATER WARRANTY**



F-1000
Shown with standard stand



CE CERTIFIED
BY CERTIFICATION EXPERTS
THE NETHERLANDS

F-100

16" x 16" (41 x 41 cm)
1,625w @ 120v or 240v
NEMA 5-15P or 6-15P

F-1000

18" x 18" (46 x 46 cm)
1,950w @ 120v or 2,600w @ 240v
NEMA 5-20P or 6-15P

F-100

15 Year Heater Warranty
1,625 Watt IR Heater
On/off power switch
Heavy duty side handles
Head leveler to adjust the heater parallel to the pallet
Heat shields for even heater temperature

Features

F-1000

15 Year Heater Warranty
1,950 or 2,600 Watt IR Heater
Heat control with power lights
Heavy duty side handles and locking wheels
Head leveler to adjust the heater parallel to the pallet
Heat shields for even heater temperature


Options

- Super Heavy Duty Stand
- AutoFlash
- Rotary Table
- Wheel Set (F-100 only)

** Domestic plugs listed. International cords available.



INFRARED FLASH CURE ACCESSORIES

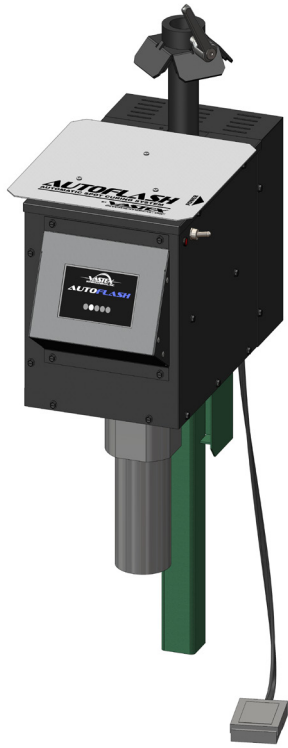


AUTOFLASH

FEATURES

- Touch Screen Display
- Selectable clockwise or counterclockwise rotation
- Smooth start and stop with eccentric arm drive
- 0 to 99 second adjustable dwell timer
- Foot pedal actuator on 7 foot cord

RedFlash shown with AutoFlash
and SHHD Stand

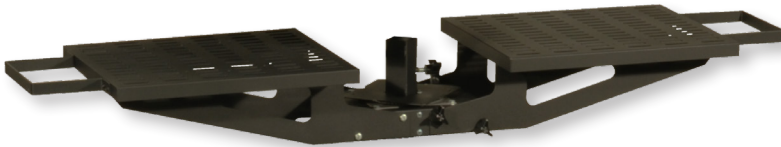

ROTARY TABLE

FEATURES

- Easily mounts to standard and SHHD stands
- Rotates under flash head to cure shirts
- Two sizes available for use with 18" sq and 18" x 24" flash

F-100 shown with Rotary Table



SHHD-STAND

FEATURES

- Super heavy duty stand to hold added weight
- Ideal for use with AutoFlash or heavier AirFlash
- Offset legs allow for stand to fit mostly under press













Flash Cure Units

Technical Specifications

CE	F-100	F-1000	REDFLASH		AIR-FLASH	
Models	F-100	F-1000	RD-18-240	RD-1824-240	RAD-18	RAD-1824
Heater Warranty	15 Year	15 Year	15 Year	15 Year	15 Year	15 Year
Bumper to Bumper Warranty	3 Year	3 Year	3 Year	3 Year	3 Year	3 Year
Heater Size	16" x 16" (41 x 41 cm)	18" x 18" (46 x 46 cm)	18" x 18" (46 x 46 cm)	18" x 24" (46 x 61 cm)	18" x 18" (46 x 46 cm)	18" x 24" (46 x 61 cm)
Controls	On/Off Switch	Bi-Metal control w/ adjustment knob	Digital percentage timer	Digital percentage timer	Digital percentage timer	Digital percentage timer
Unit Warm Up Time	15 min. (120V) or 10 min. (240V)	20 min. (120V) or 10 min (240V)	6 min.	12 min.	6-10 min	6-10 min
Heater Wattage	1625 Watt Heater	1950 (120V) or 2600 (240V) Watt Heater	2600 or 3500 Watt Heater	3500 Watt Heater	3500 Watt Heater	4300 Watt Heater
Electrical Specs* / included plug (Some models require a dedicated line. 50/60 HZ for all units.)	120V/13A/1625W NEMA 5-15P 240V/6.5A/1625W NEMA 6-15-P	120V/15.6/1950W NEMA 5-20P 240V/11/2600W NEMA 6-15-P	240V/11A/2600W NEMA 6-15P 240V/16A/3500W NEMA 6-20P	240V/16A/3500W/ NEMA 6-20P Plug	240V/16A/3500W NEMA 6-20P	240V/22A/4300W/ NEMA 6-30LP (plug optional)
Electrical Specs - AutoFlash / included plug	110-125V/1A/NEMA 5-15P 220-240V/1A/NEMA 6-15P					

NORTH AMERICAN POWER PLUG CONFIGURATION

RECEPTACLE	PLUG
 NEMA 5-15R	 NEMA 5-15P
 NEMA 5-20R	 NEMA 5-20P
 NEMA 6-15R	 NEMA 6-15P
 NEMA 6-20R	 NEMA 6-20P
 NEMA L6-30R	 NEMA L6-30P

Shipping Weights and Dimensions

	Weight**	Dimensions**
F-100 (Head and Stand)	39 lbs (18 kg)	23" x 28" x 9" (58 x 71 x 22.9 cm)
F-1000 (Head and Stand)	42 lbs (19 kg)	23" x 28" x 9" (58 x 71 x 22.9 cm)
R-18-240 (Head Only)	35 lbs (16 kg)	26" x 29" x 7" (66 x 74 x 18 cm)
R-1824-240 (Head Only)	43 lbs (19.5 kg)	26" x 35" x 8" (66 x 90 x 20 cm)
RA-18-HO (Head Only)	64 lbs (29 kg)	29" x 26" x 15" (74 x 66 x 38 cm)
RA-1824 (Head Only)	74 lbs (35.5 kg)	35" x 29" x 15" (89 x 74 x 38 cm)
AF-120/AF-240 AutoFlash kit	51 lbs (25 kg)	31" x 22" x 14" (79 x 56 x 36 cm)
SH-STAND-WS Standard Stand for Manual Flash	22 lbs (10 kg)	37" x 7" x 3" (94 x 18 x 8 cm)
SHHD-STAND-M Heavy Duty Stand for Manual Flash	42 lbs (19kg)	30" x 14" x 7" (76 x 35.5 x 18 cm)
SH-LEGS-AF Standard Stand for AutoFlash	15 lbs (7 kg)	37" x 7" x 3" (94 x 18 x 8 cm)
SHHD-STAND Heavy Duty Stand for AutoFlash	39 lbs (18 kg)	30" x 15" x 11" (76 x 38 x 28 cm)

*If extension cord is required, consult a licensed electrician.

**All shipping weights and dimensions are for continental US shipping only. Call for other shipping specifications.

1 in = 2.54 cm
1 lb = 0.454 kg

